

# PW16A...


Single point load cells

## Special features

- Maximum capacities: 30 kg ... 660 kg
- Aluminum
- High ratio of minimum verification interval Y
- Off-center load compensation
- Complies with EMC directives
- Explosion protection and other options also available



Dimensions in mm (1 mm = 0.03937 inches)

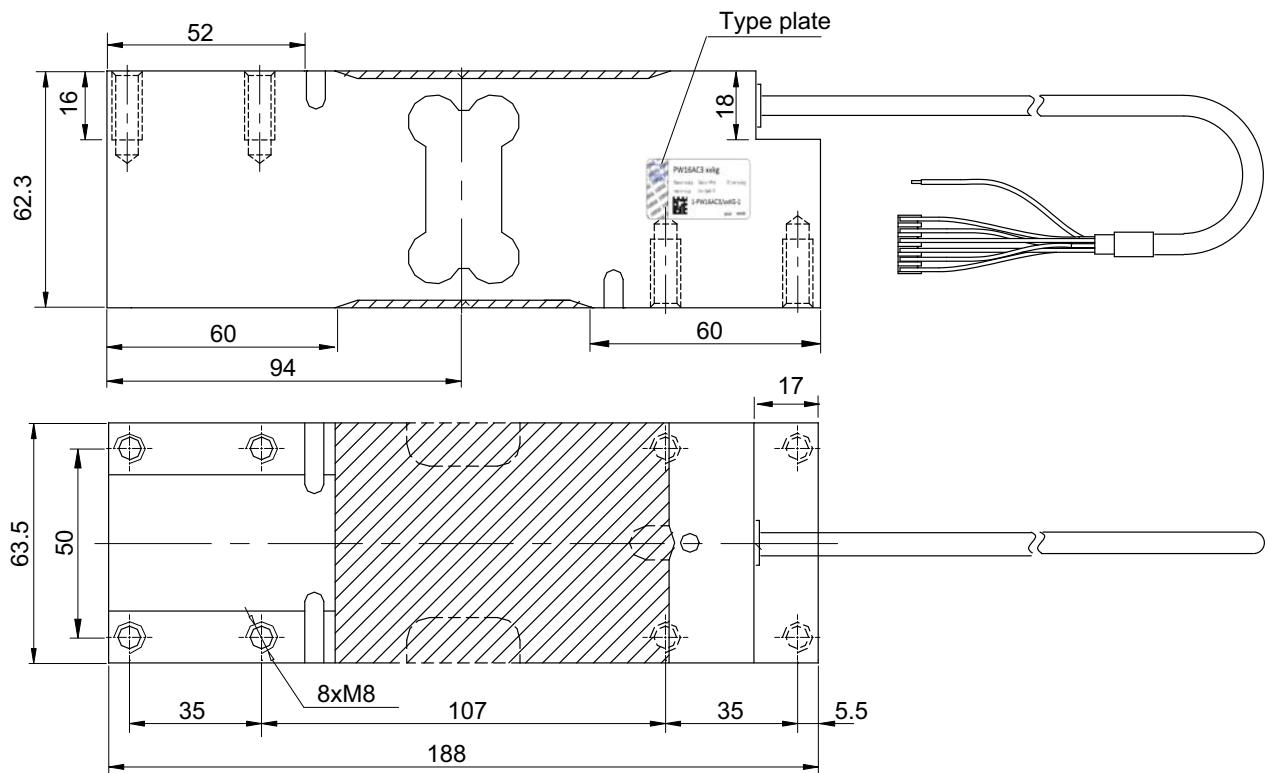

## Specifications

Type	PW16A...													
Accuracy class <sup>1)</sup>	C3 Multi Range (MR)													
Number of load cell verification intervals	$n_{LC}$		3000											
Maximum capacity	$E_{max}$	kg	30	50	75	100	150	200	250	300	500	660		
Minimum load cell verification interval	$v_{min}$	g	2	5	5	10	10	20	20	20	50	50		
Temperature coefficient of zero signal	$TC_0$	% of $C_n$ / 10 K	$\pm 0.0093$	$\pm 0.0140$	$\pm 0.0093$	$\pm 0.0140$	$\pm 0.0093$	$\pm 0.0140$	$\pm 0.0112$	$\pm 0.0093$	$\pm 0.0140$	$\pm 0.0106$		
Ratio of minimum verification interval Y	Y		15,000	10,000	15,000	10,000	15,000	10,000	12,500	15,000	10,000	13,200		
Maximum platform size		mm	600 x 600											
Nominal sensitivity	$C_n$	mV/V	2.0 $\pm$ 0.2											
Zero signal			0 $\pm$ 0.1											
Temperature coefficient of sensitivity <sup>2)</sup>	$TC_S$	% of $C_n$ / 10 K	$\pm 0.0175$ $\pm 0.0117$											
Temperature range +20 ... +40 °C		% of $C_n$	$\pm 0.0166$											
-10 ... +20 °C			$\pm 0.0166$											
Relative reversibility error <sup>2)</sup>	$d_{hy}$		$\pm 0.0166$											
Non-linearity <sup>2)</sup>	$d_{lin}$		$\pm 0.0166$											
Minimum dead load output return	DR	$\Omega$	$\pm 0.0166$											
Off-center load error <sup>3)</sup>			$\pm 0.0233$											
Input resistance	$R_{LC}$		300 ... 500											
Output resistance	$R_0$	V	300 ... 500											
Reference excitation voltage	$U_{ref}$		5											
Nominal (rated) range of the excitation voltage	$B_U$		1 ... 12											
Max. excitation voltage			15											
Insulation resistance at 100 V <sub>DC</sub>	$R_{is}$	$G\Omega$	> 2											
Nominal (rated) range of the ambient temperature	$B_T$	°C	-10 ... +40											
Service temp. range	$B_{tu}$		-10 ... +50											
Storage temp. range	$B_{tl}$		-25 ... +70											
Limit load	$E_L$	% of $E_{max}$	150											
Limit lateral loading, static	$E_{lq}$		300											
Breaking load	$E_d$		300											
Rated displacement at $E_{max}$ , approx.	$s_{nom}$	mm	< 0.5											
Weight, approx.	m	kg	1.8											
Degree of protection <sup>4)</sup>			IP67											
Material:														
Measuring body			Aluminum											
Covering agent			Silicone rubber											
Cable sheath			PVC											

1) As per OIMLR60, with  $P_{LC} = 0.7$


2) If the values for non-linearity ( $d_{lin}$ ), relative reversibility error ( $d_{hy}$ ) and temperature coefficient of sensitivity ( $TC_C$ ) are added together, they are within the cumulated error limit specified in OIML R60.

3) Off-center load deviation per OIML R76.

4) EN 60 529 (IEC 529)

## Cable assignment

6-wire cable connection (available cable lengths: 1.5 m; 3 m; 6 m; 12 m)

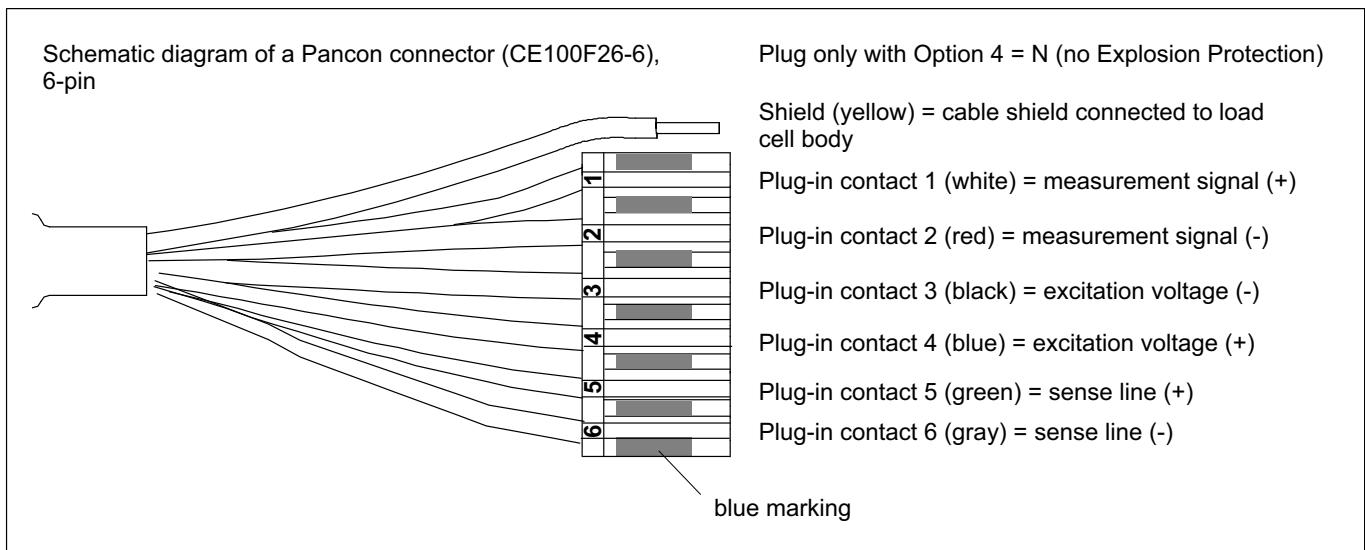


## Mounting and load application

The load cells are attached at the mounting holes, the load is applied at the other end. The recommended screws and tightening torques can be found in the table below:

Maximum capacities	Thread	Min. property class	Tightening torque <sup>1)</sup>
30...500 kg	M8	10.9	32 N·m
660 kg	M8	12.9	39 N·m

<sup>1)</sup> Recommended value for the specified property class. Please comply with the screw manufacturer's instructions with regard to screw dimensions

Load must not be applied to the side where the cable connection is located, as this would cause a force shunt.

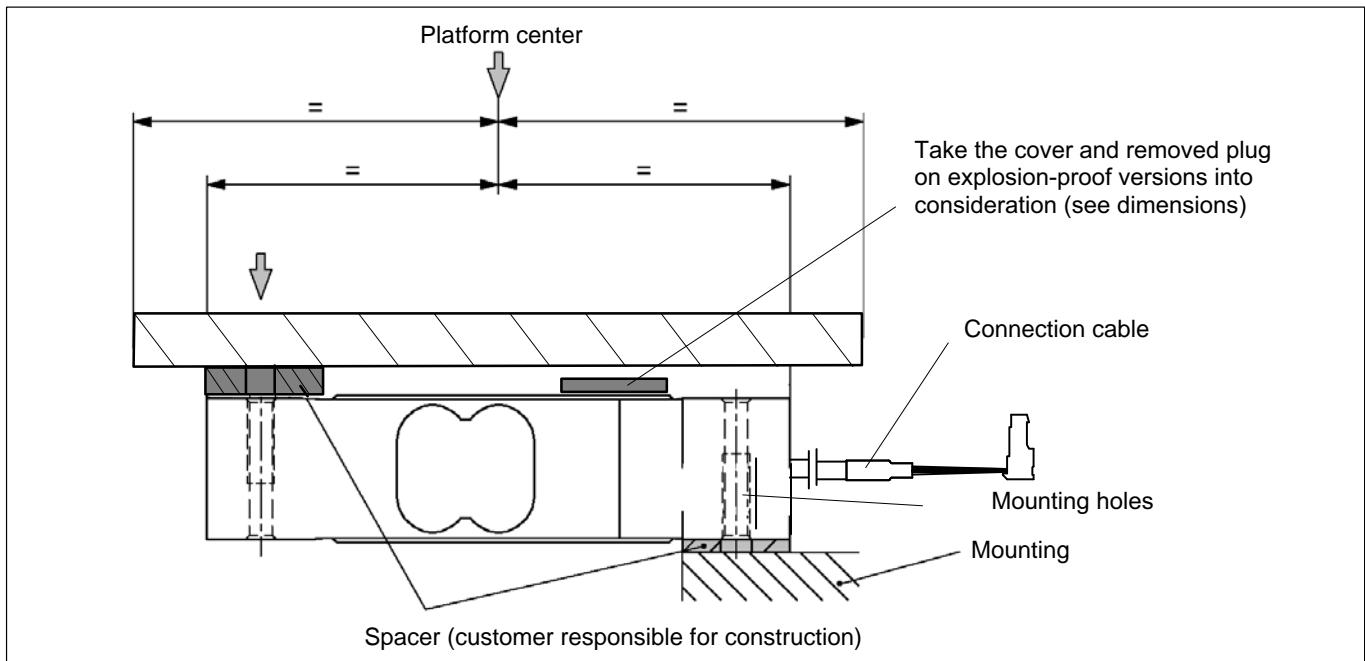

## Product numbers

### PW16A... (aluminum)

Type	PW16A		
Accuracy class	C3-MR (OIML) (Multi Range)		
Comments	Cable length 3 m (6-wire)		
Maximum capacity	Ordering number	Maximum capacity	Ordering number
30 kg	1-PW16AC3/30KG-1	200 kg	1-PW16AC3/200KG-1
50 kg	1-PW16AC3/50KG-1	250 kg	1-PW16AC3/250KG-1
75 kg	1-PW16AC3/75KG-1	300 kg	1-PW16AC3/300KG-1
100 kg	1-PW16AC3/100KG-1	500 kg	1-PW16AC3/500KG-1
150 kg	1-PW16AC3/150KG-1	660 kg	1-PW16AC3/660KG-1

### K-PW16A... (aluminum), optional version

Ordering number	K-PW16A		
Code	Option 1: Mechanical design		
N	-		
Code	Option 2: Accuracy class		
MR	C3-MR (OIML) (Multi Range)		
Code	Option 3: Maximum capacity		
30	30 kg		
50	50 kg		
75	75 kg		
100	100 kg		
150	150 kg		
200	200 kg		
250	250 kg		
300	300 kg		
500	500 kg		
660	660 kg		
Code	Option 4: Explosion protection		
N	No explosion protection		
AI1/21	IECEx+ATEX Zone 1/21+FM, intrinsically safe II 2G Ex ia IIC T6/T4 Gb/II2 D Ex ia IIIC T125°C Db*		
AI2/22	IECEx+ATEX Zone 2/22, not intrinsically safe II 3G Ex ec IIC T6/T4 Gc/II 3D Ex tc IIIC T125°C Dc*		
Code	Option 5: Cable length		
1.5	1.5 m		
3	3 m (standard)		
6	6 m		
12	12 m		
Code	Option 6: Other		
N	Without		
A	2mV/V $\pm 0.1\%$ / $410 \Omega \pm 0.3 \Omega$ [only with option 4 = N] (adjusted output, suitable for parallel connection)		
K-PW16A	-	N	-
	-		-
	-		-
	-		-

\* Including EC-Type Examination Certificate/Certificate of Conformity BVS 13 ATEX X 108 X/IECEx BVS 13.0109 X

Not all codes can be combined with one another. Take note of the conditions in square brackets!

Subject to modifications.

All product descriptions are for general information only. They are not to be understood as a guarantee of quality or durability.

**Hottinger Baldwin Messtechnik GmbH**

Im Tiefen See 45 · 64293 Darmstadt · Germany  
Tel. +49 6151 803-0 · Fax +49 6151 803-9100  
E-mail: info@hbm.com · www.hbm.com

**measure and predict with confidence**

